

E.C.T

Eldor Communication Technologies

Main Office: 22 Hamelacha St. P.O.B. 11401 Rosh-Haayin

Tel: 972-3-902-4750 Fax: 972-3-902-4760

Northern Branch: 12 Ba'alei Hamelacha St. Haifa



Tel. 972-4-8404505 Fax. 972-4-8404506

www.eldor-il.com • eldor@eldor-il.com






Main Structure

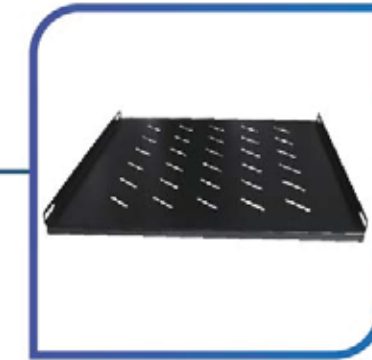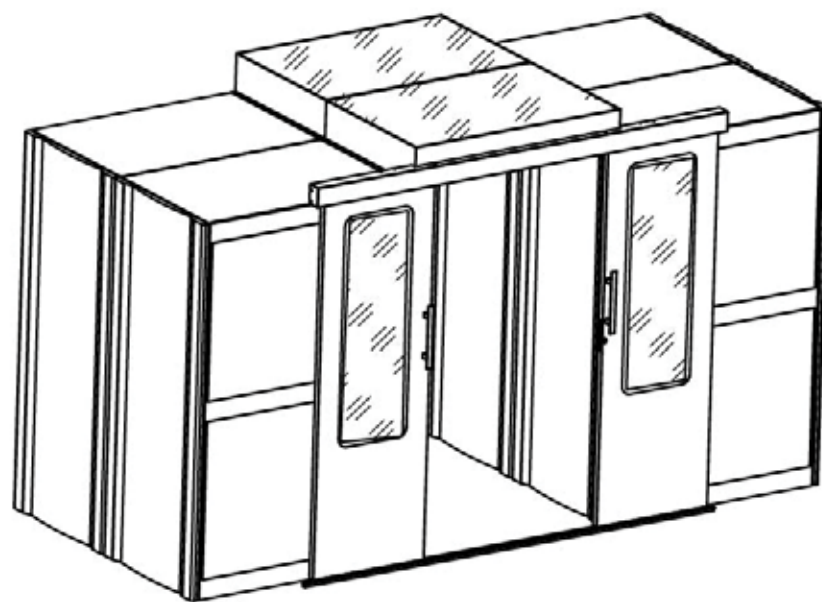

EC-001 Free Standing Cabinet

Eldor Communication Technologies **E.C.T**

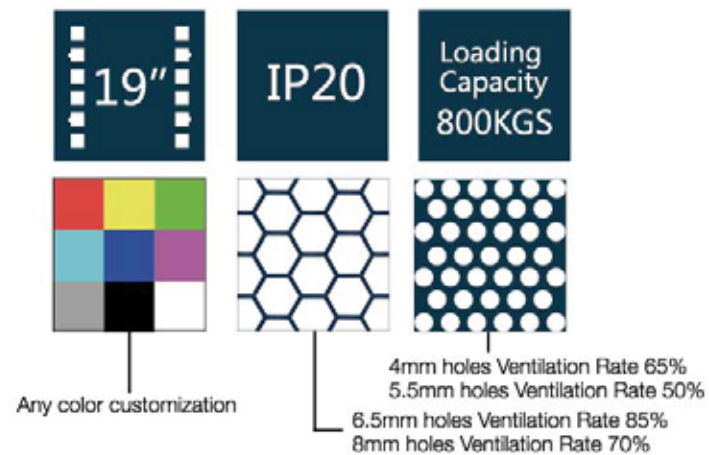

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *High-density ARC vented front single & rear dual doors, Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:


Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:


RAL7035, RAL9004 etc.

Main Structure

NO	Item
01	Top Cover
02	Fan Tray
03	Front ARC Mesh Door
04	Rail Mount
05	Connect Bar
06	Bottom cover
07	Wheels
08	Adjustable Feet
09	Castor Panel
10	Side Panel
11	Rear Dual Mesh Door

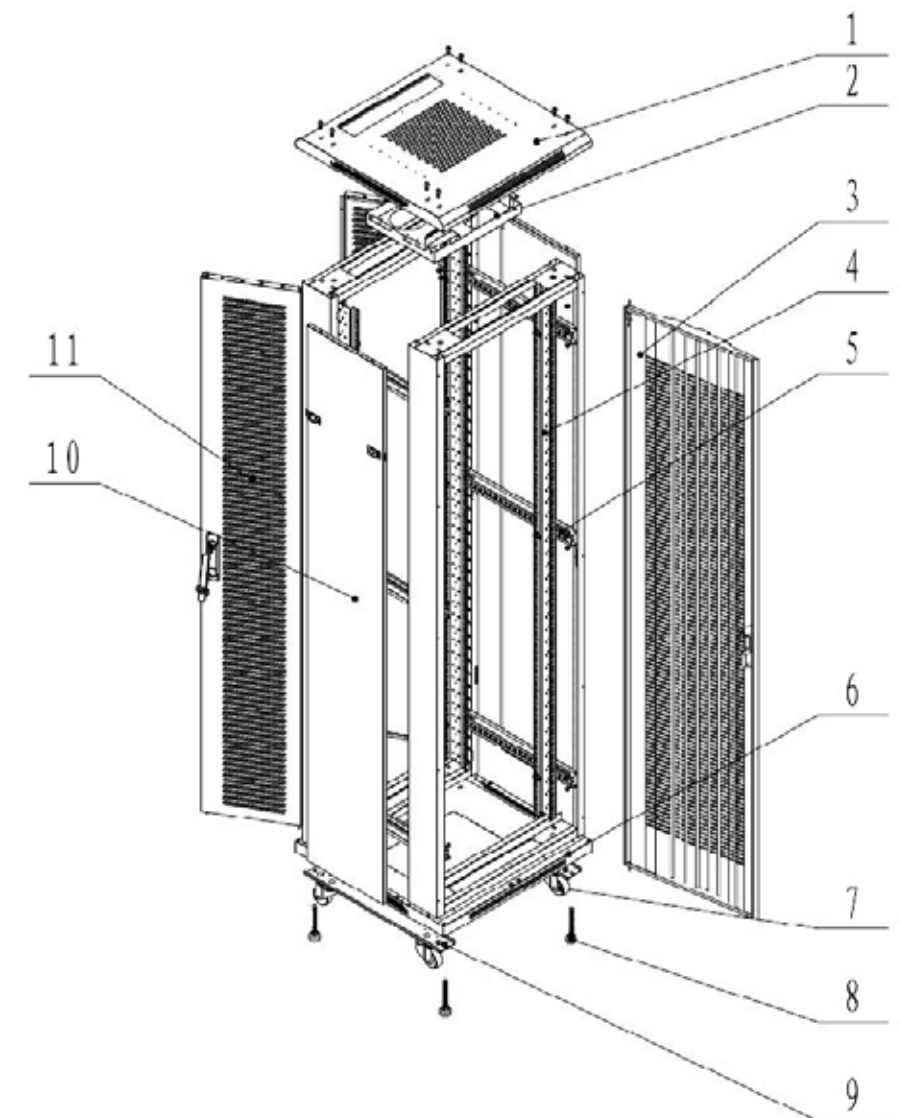

MULTI-VIEW

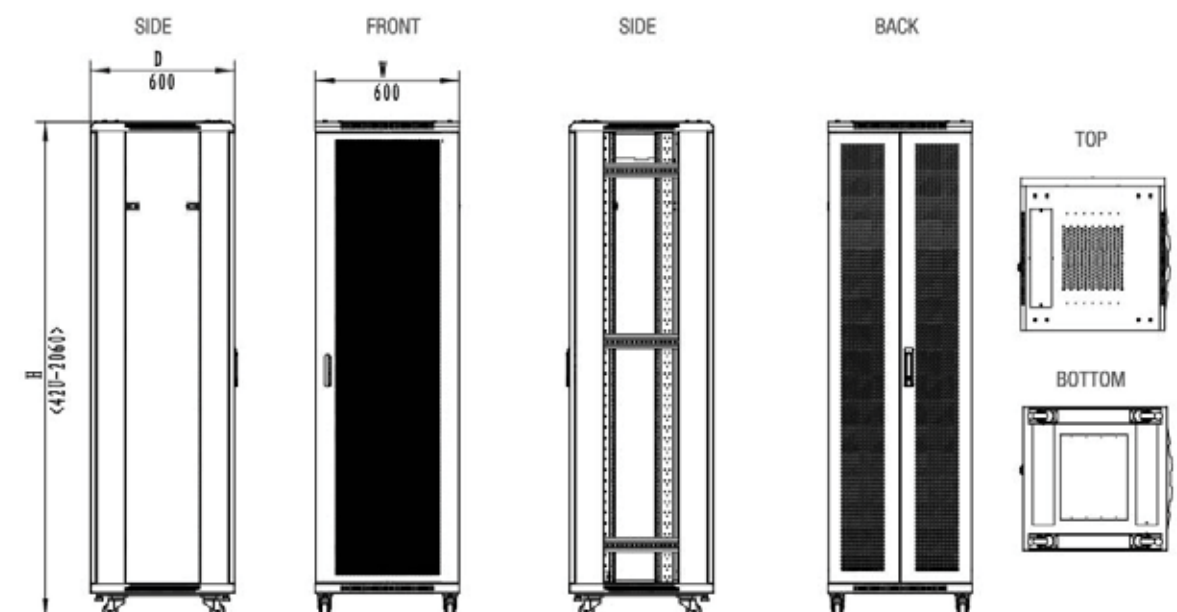

>Front ARC Mesh Door With Exquisite Design.



>Top with Fan Tray.
2Pieces for 600mm depth
4Pieces for 800mm,1000mm depth.



>Rail Mounts with "U" Marking,
it's easy to install the equipment
in right height.





>Accessory Package with Small Carton
Box,It's Very Easy to be Found In the
Cabinet.

EC-001B Free standing cabinet

Eldor Communication Technologies **E.C.T**

EC-001B Free Standing Cabinet

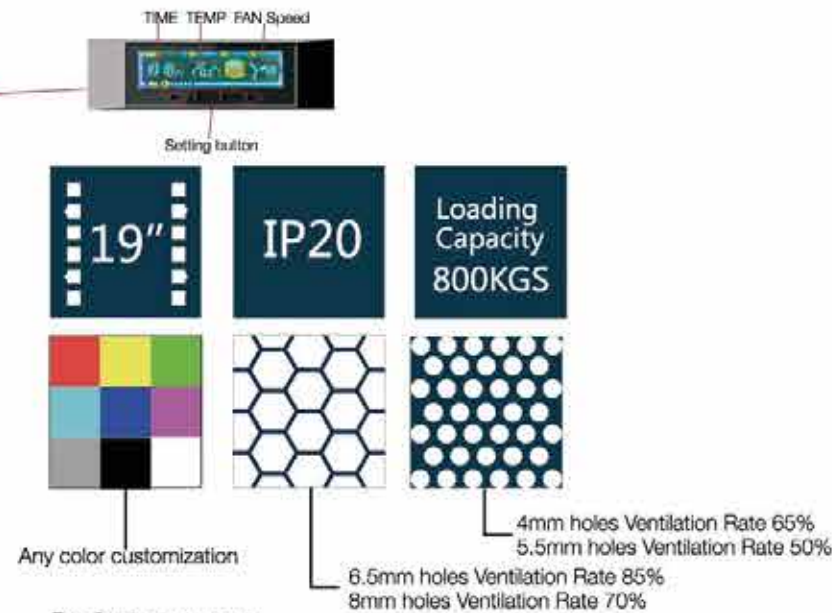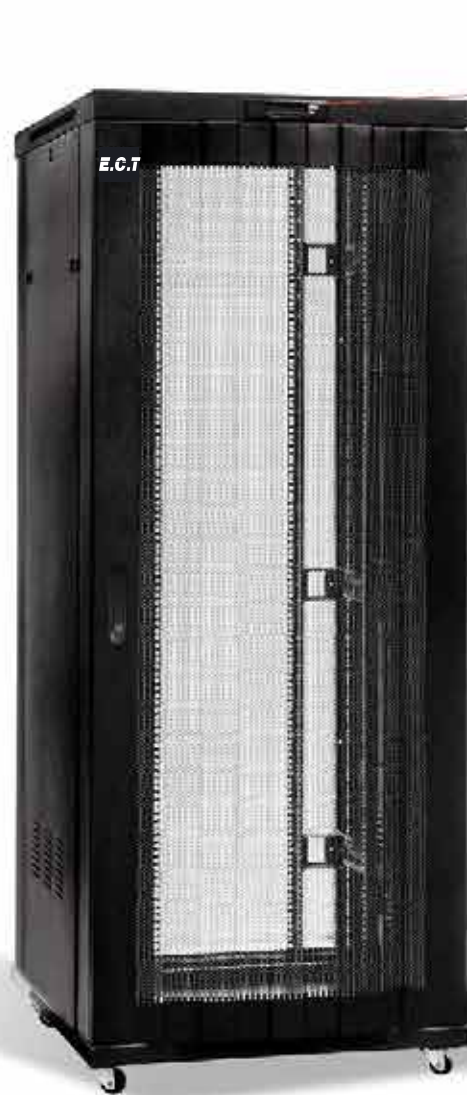

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *High-density APC vented front single & rear dual doors, Lockable door and side panels for system security;
- *Top with LCD Control Panel to Control the Fans work.
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm



Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.

Multi-View

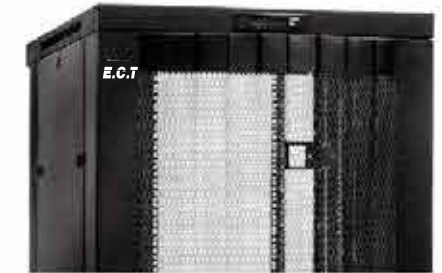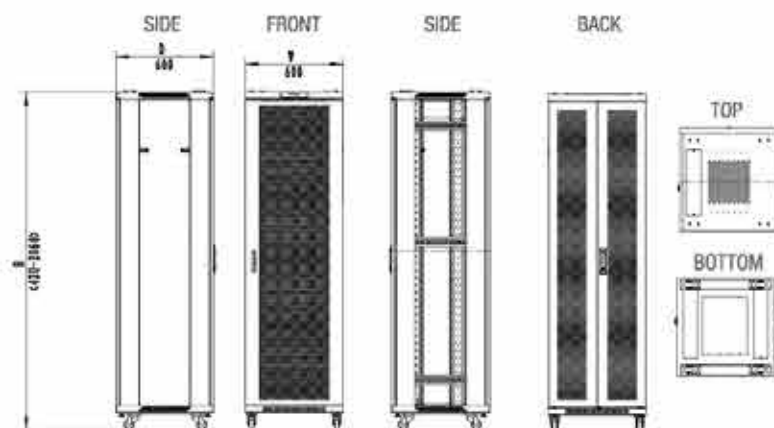

>Top with LCD Control Panel to Control the fan's working.



>Top with Fan Tray. 2Pieces for 600mm Depth 4Pieces for 800mm, 1000mm Depth



>Rail Mounts with "U" Marking. It's Easy to install the Equipment in Right Height.



>High Quality Spring Lock, Easy to Open and Close the Door.

EC-002 Free Standing Cabinet



Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *Toughened temper glass door front and rear solid steel door
- *Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swivelling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.



>Front and Rear Door Bolt, the Doors can be Installed Right or Left Side.



>Connect Bar with Square Holes can be Adjust the Depth with Rail Mounts.



>Top with Fan Tray.
2Pieces for 800mm Depth
4Pieces for 800mm, 1000mm Depth




>High Quality Spring Lock, Easy to Open and Close the Door.

Main Structure

NO	Item
01	Top Cover
02	Bottom Cover
03	Frame
04	Front Glass Door
05	Side Door
06	Rear Door
07	Connect Bar
08	Rail
09	Top Panel
10	Bottom Panel
11	Castor



MULTI-VIEW

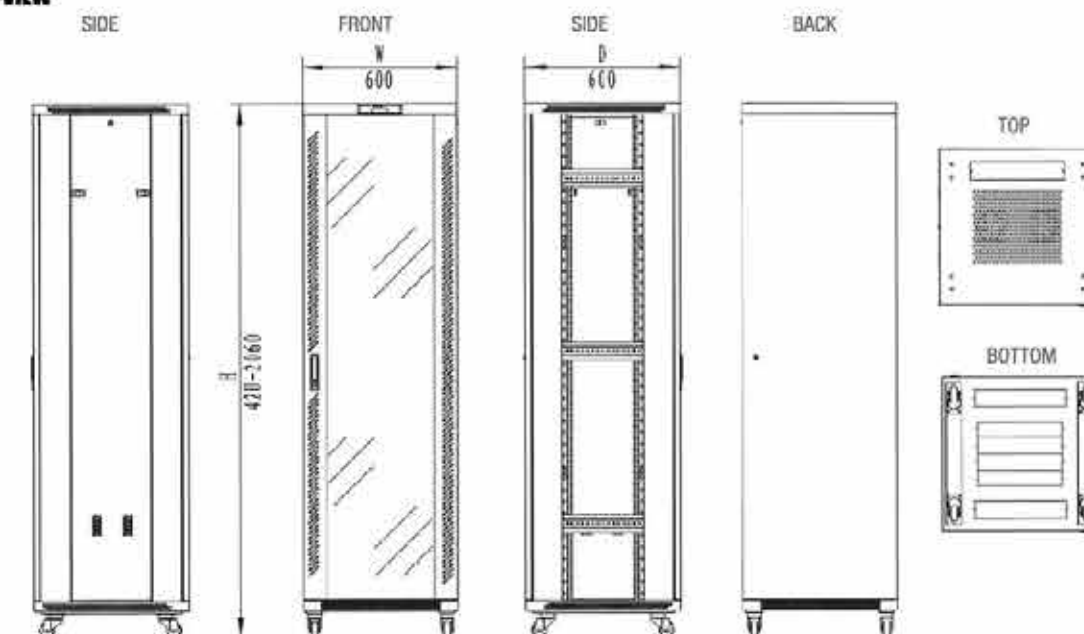

EC-002B Free Standing Cabinet

Eldor Communication Technologies **E.C.T**



19"

IP20

Loading
Capacity
800KGS



Any color customization

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *Toughened temper glass door front and rear solid steel door
- *Top with LCD Control Panel to Control the Fans Work.
- *Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.



>Front and Rear Door Bolt, the Doors can be Installed Right or Left Side.



>Connect Bar with Square Holes can be Adjust the Depth with Rail Mounts.




>Top with Fan Tray:
2Pieces for 600mm Depth
4Pieces for 800mm, 1000mm Depth




>High Quality Spring Lock, Easy to Open and Close the Door.

Main Structure

NO	Item
01	Top Cover
02	Side Panel
03	Fan Tray
04	Frame
05	Front temper glass door
06	Bottom Cover
07	Fixed Shelf
08	Wheel and Wheel Panel
09	Rail Mount
10	Connect Bar
11	Back Steel Door
12	LCD Control Panel

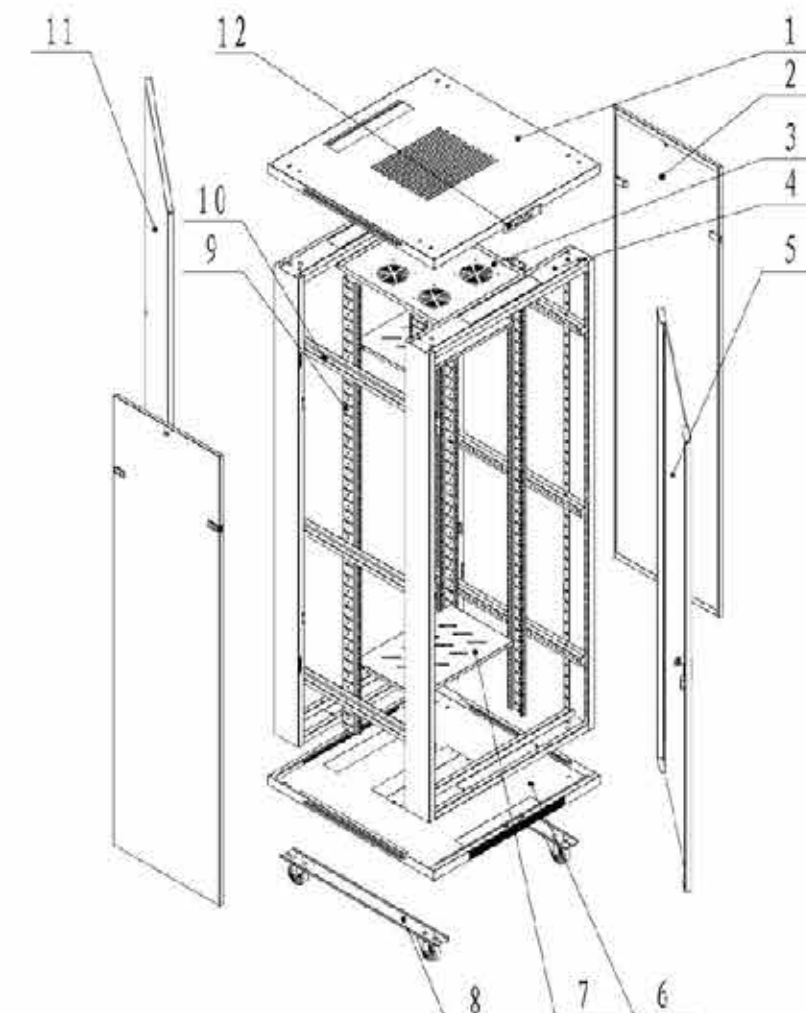


MULTI-VIEW

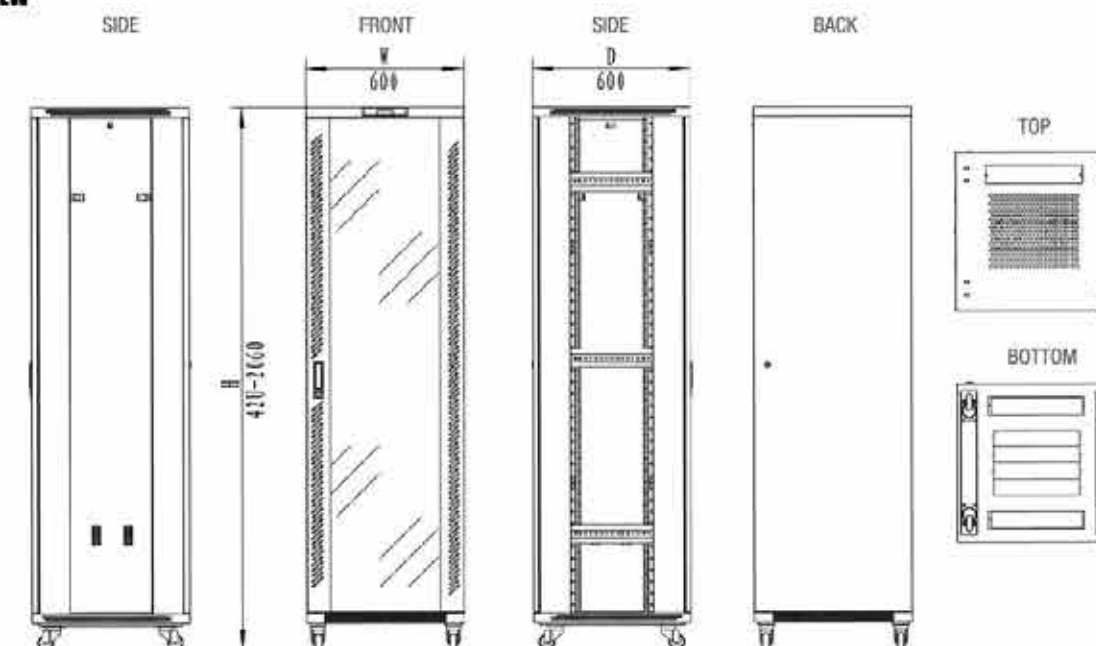

EC-003 Free Standing Cabinet

Eldor Communication Technologies **E.C.T**

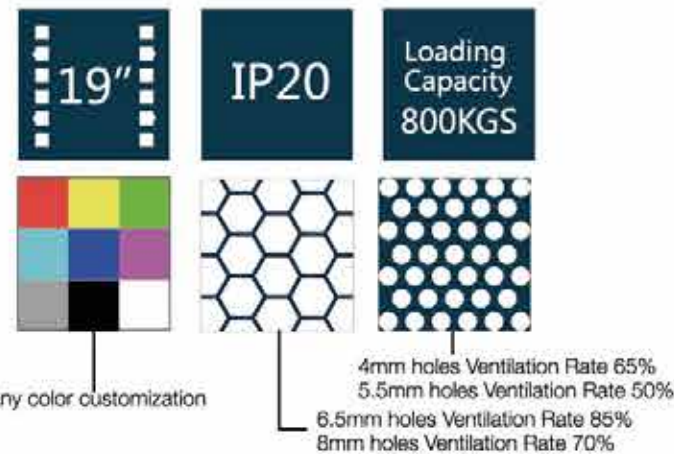

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *Toughened temper glass door front with door boarder and High-density vented rear door
- *Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

Standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.



>Top with Fan Tray.
2Pieces for 600mm Depth
4Pieces for 800mm, 1000mm Depth



>Front and Rear Door Bolt, the Doors can be Installed Right or Left Side.




>Connect Bar with Square Holes can be Adjust the Depth with Rail Mounts.




>High Quality Spring Lock, Easy to Open and Close the Door.

Main Structure


NO	Item
01	Top Cover
02	Fan Tray
03	Side Door
04	Vertical Cable Management
05	Cable Management Cover
06	Fixed Shelf
07	Front Temper glass door
08	Wheel
09	Bottom Cover
10	Frame
11	Rail Mount
12	Connect Bar
13	Adjustable Feet
14	Back Flat mesh door
15	Frame

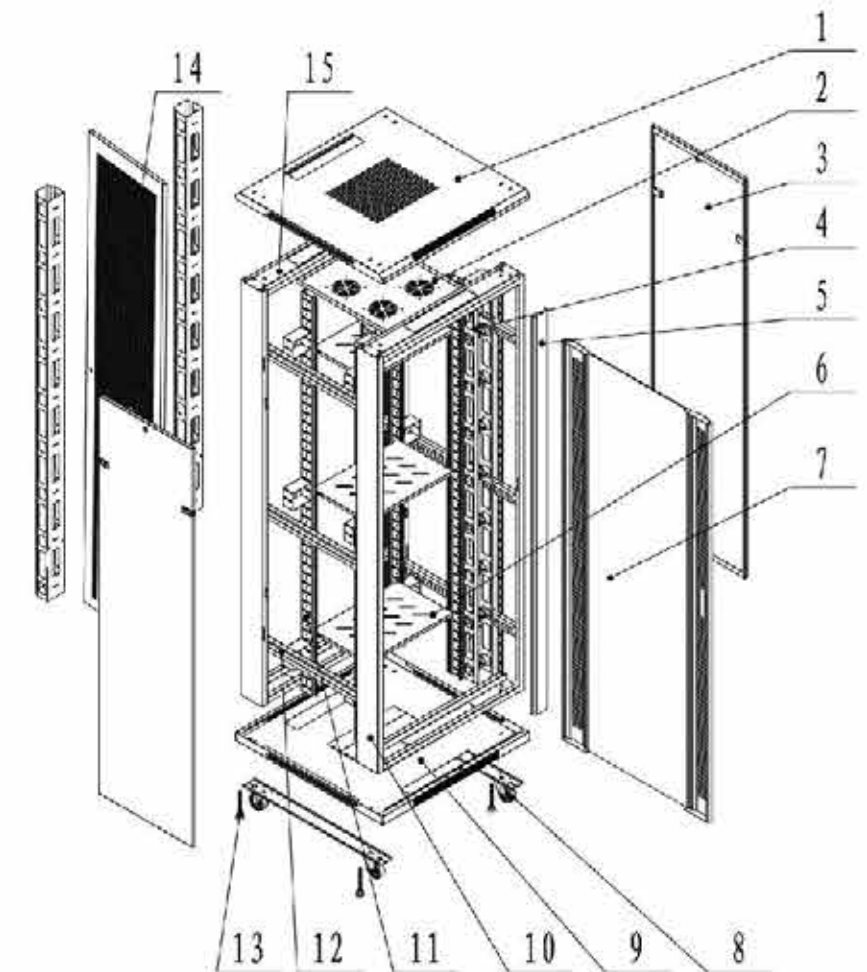

MULTI-VIEW

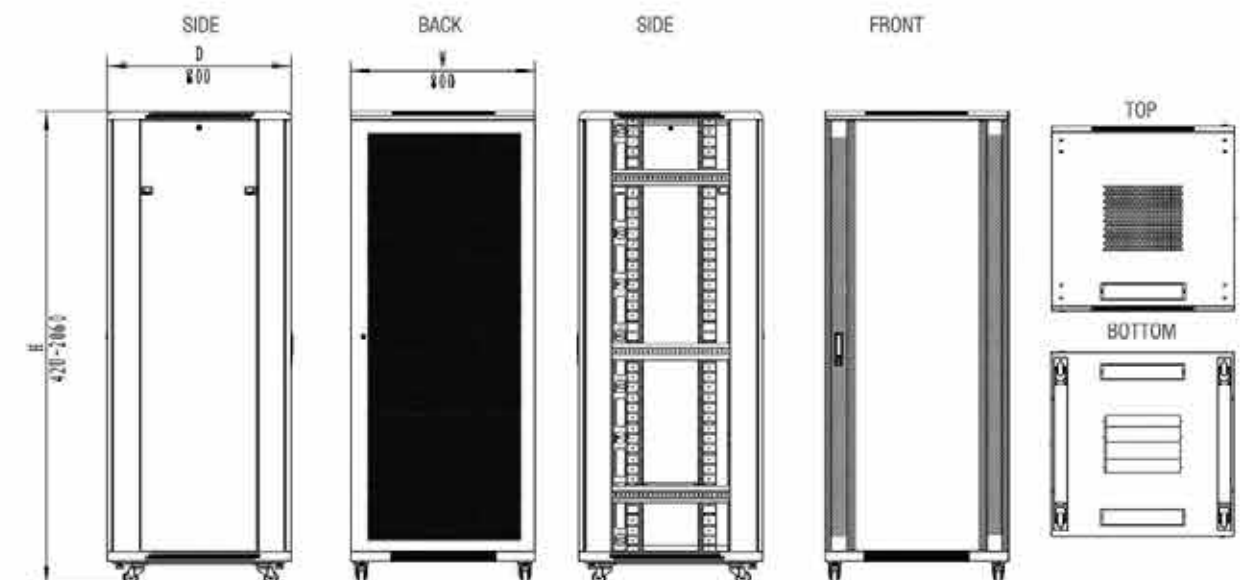

EC-004 Free Standing Cabinet

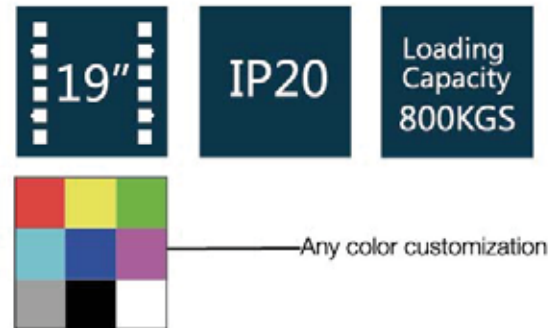

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *Smoky Grey Color Temper glass door front and rear solid steel door
- *Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.




Rail Mounts with "U" Marking, It's Easy to Install the Equipment in Right Height.



>High Quality Spring Lock, Easy to Open and Close the Door.




>Back Door Small Round Lock, can be Changed to Spring Lock




> Bottom Cable Entry, Protect from Small Animals to Get into the Cabinet.

Main Structure

NO	Item
01	Top Cover
02	Fan Tray
03	Front Temper Glass Door
04	Rail Mount
05	Connect Bar
06	Bottom Cover
07	Wheels
08	Adjustable Feet
09	Wheel panel
10	Frame
11	Side Panel
12	Rear Steel Door

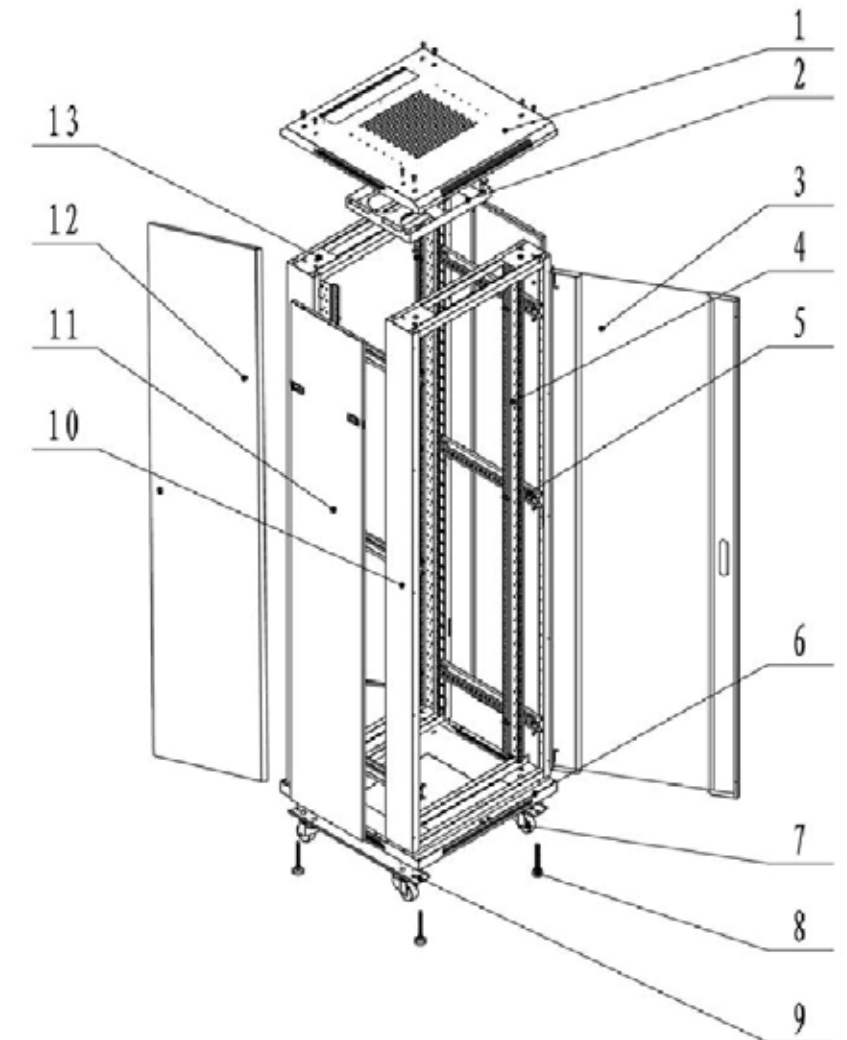

MULTI-VIEW

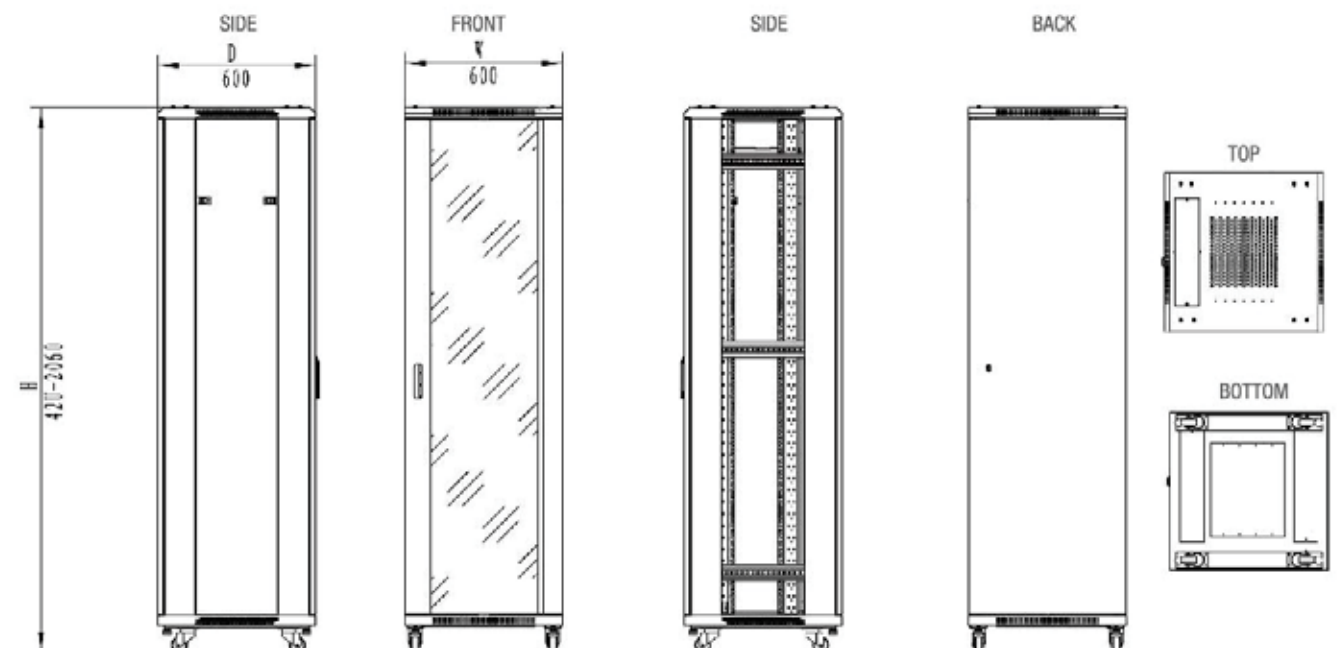

EC-005 Free Standing Cabinet

Eldor Communication Technologies **E.C.T**



Any color customization



Fan directly installed on the top cover, economy optional



Durable PE Gasket

Reinforcement & Craftsmanship




Grounding Screw(Copper)

POM Axle Gasket, More durable, Less noise

Main Structure

NO Item

- | | |
|----|------------------|
| 01 | Top Cover |
| 02 | Bottom Cover |
| 03 | Frame |
| 04 | Front Glass Door |
| 05 | Side Door |
| 06 | Rear Door |
| 07 | Connect Bar |
| 08 | Rail |
| 09 | Top Panel |
| 10 | Bottom Panel |
| 11 | Castor |

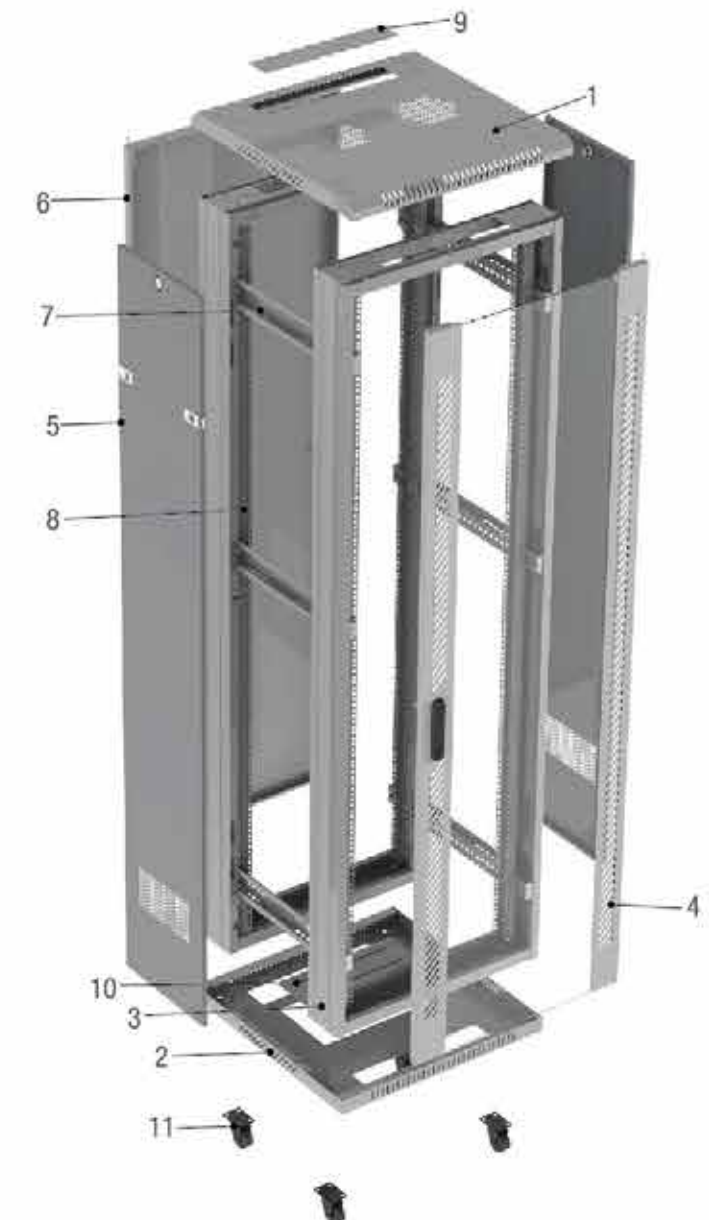

Product Description:

- *Exquisite design with precise dimension and craftsmanship;
- *Toughened temper glass door front and rear solid steel door
- *Lockable door and side panels for system security;
- *Fully adjustable vertical mounting rails ;
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load ;
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable;

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2-1.0mm

Surface finish:


Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.

EC-801 Server Network Cabinet

Eldor Communication Technologies **E.C.T**

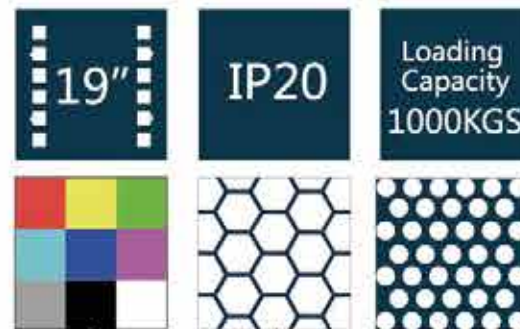

Any color customization

6.5mm holes Ventilation Rate 85%
8mm holes Ventilation Rate 70%

Loading
Capacity
1000KGS

4mm holes Ventilation Rate 65%
5.5mm holes Ventilation Rate 50%

Product Description:

- *The frame is made of nine folds structure.
- *High density vented front & rear double doors, Lockable door and side panels for system security
- *Fully adjustable vertical mounting rails
- *Swiveling wheels and legs can be jointly installed to withstand up to 800kg maximum static load
- *Several lockable wiring holes on top/bottom, size of the large hole at the bottom adjustable
- *Optional accessories.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL7044, RAL9004 etc.



>Front and Rear Door with hinge.



>Connect Bar with Square Holes can be Adjust the Depth with Rail Mounts.




>Extra Cable Ring




>Bottom Cover is Optional

Main Structure

NO	Item
01	Top Cover
02	Side Panel
03	Frame
04	Frame
05	Frame
06	Rail Mount
07	Front Flat Mesh Door
08	Connect Bar
09	Wheel
10	Bottom Cover
11	Rear Dual Mesh Door

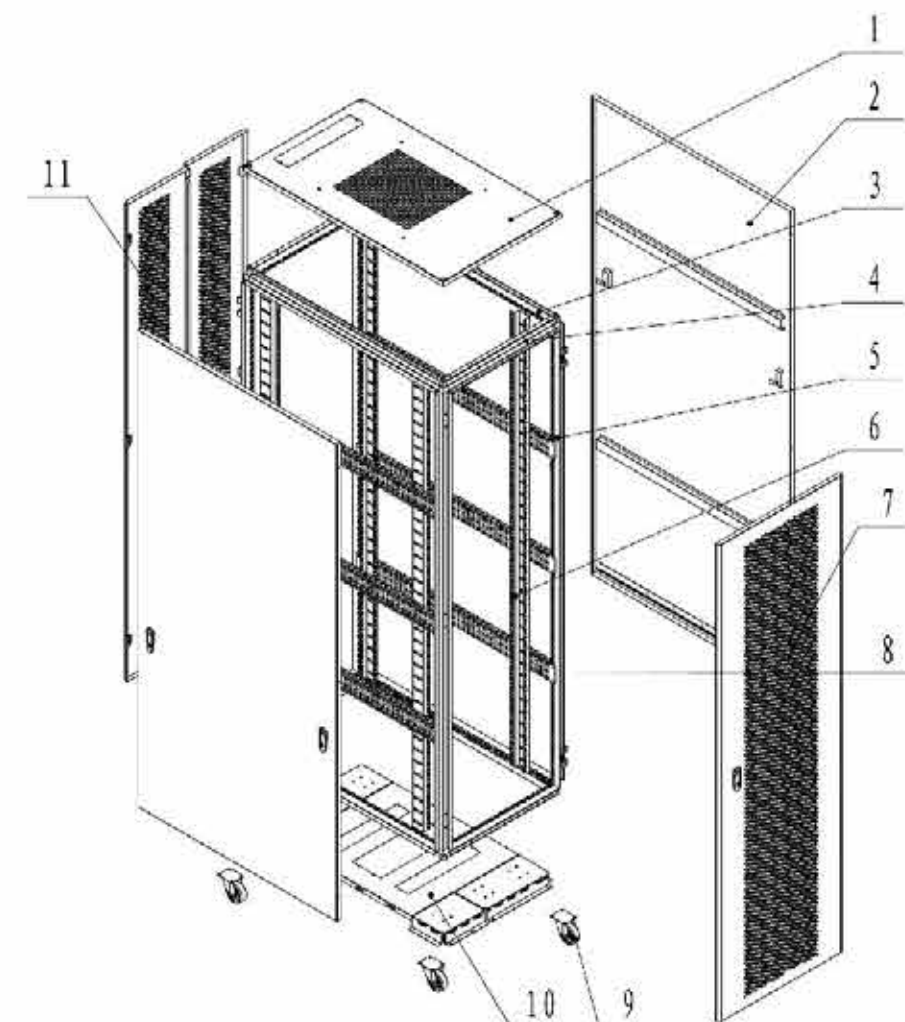


MULTI-VIEW

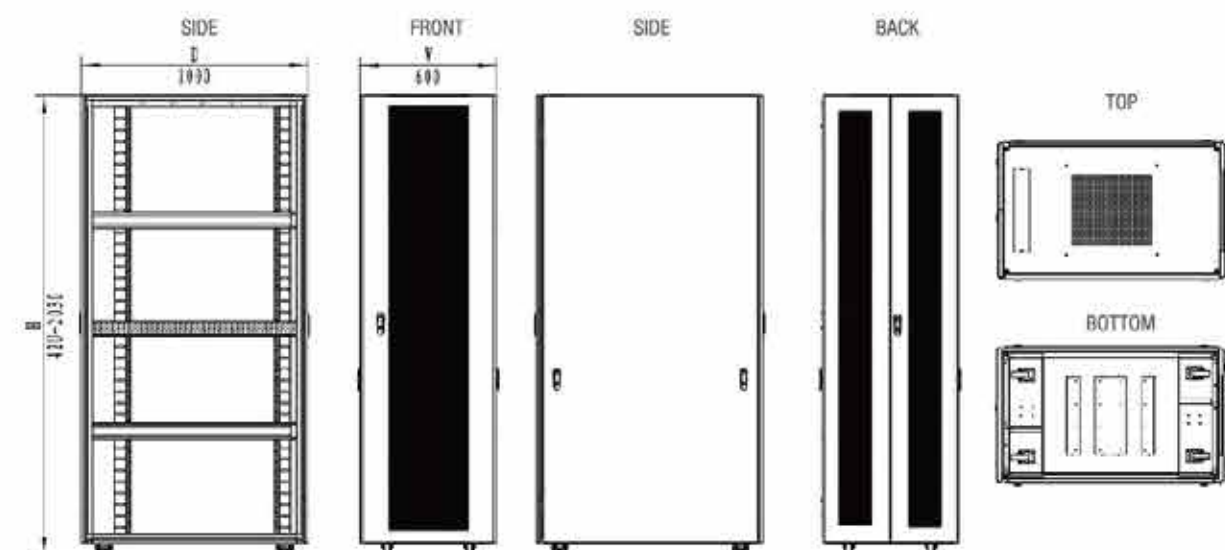

EC-802 Server Network Cabinet

Eldor Communication Technologies **E.C.T**

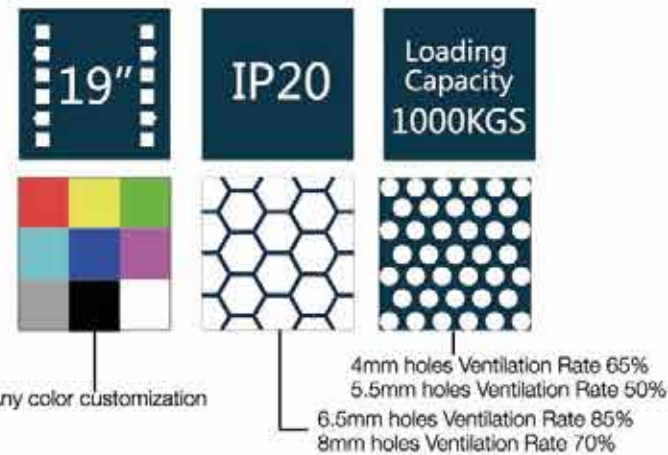

Product Description:

Front ARC vented door, rear double vented door.
Standard enclosure for low to medium density server and networking applications.
Compact width to optimize data center space.
Feature-rich enclosures optimized for easy installation, managing cables, integrating power distribution, and maximizing airflow.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL7044, RAL9004 etc.



>Top cover with Ventilate holes.
Fan Tray is Optional.




>Earth Kit with Cable.




Main Structure


NO	Item
01	Top Cover
02	Side Panel
03	Cable Management Panel
04	Front Door
05	Connect Bar
06	Fixed Shelf
07	Hinge
08	Adjustable feet
09	Wheel
10	Bottom Cover
11/12	Frame
13	Rear Dual Door
14	Rail Mount

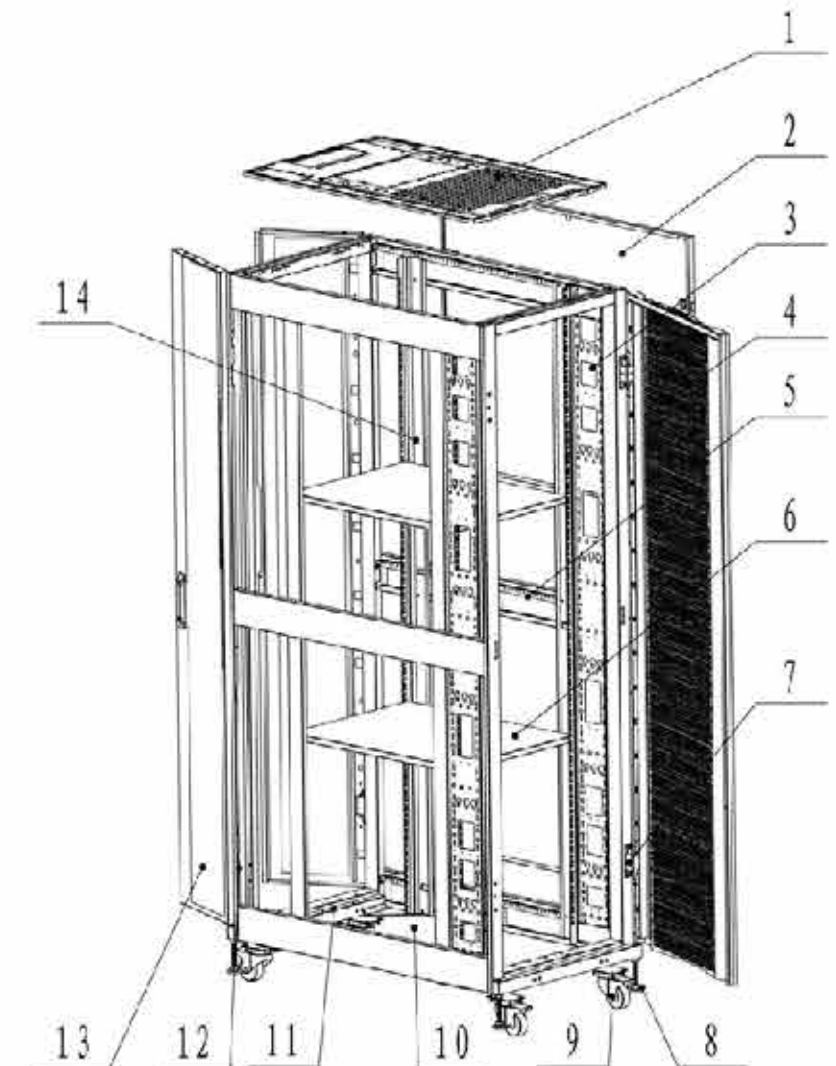

MULTI-VIEW

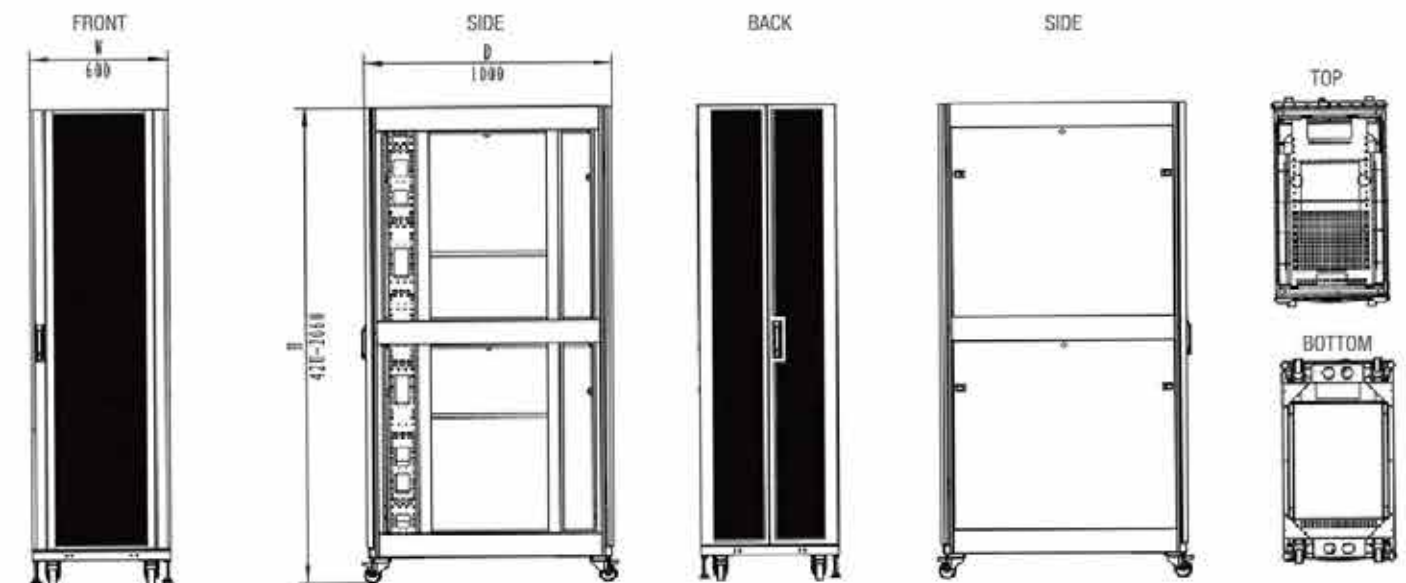

EC-803 Server Network Cabinet

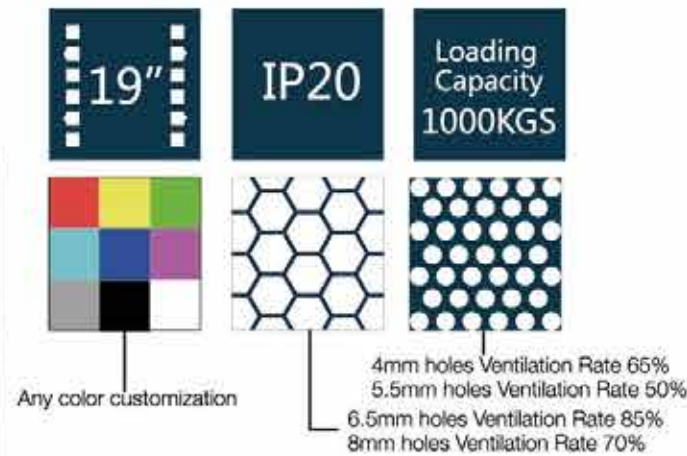

Product Description:

Front ARC vented door, rear double vented door
Standard enclosure for low to medium density server and networking applications.
Compact width to optimize data center space.
Feature-rich enclosures optimized for easy installation, managing cables, integrating power distribution, and maximizing airflow.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:


Mounting profile: 2.00mm others: 1.2--1.5mm

Surface finish:


Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:


RAL7035, RAL7044, RAL9004 etc.

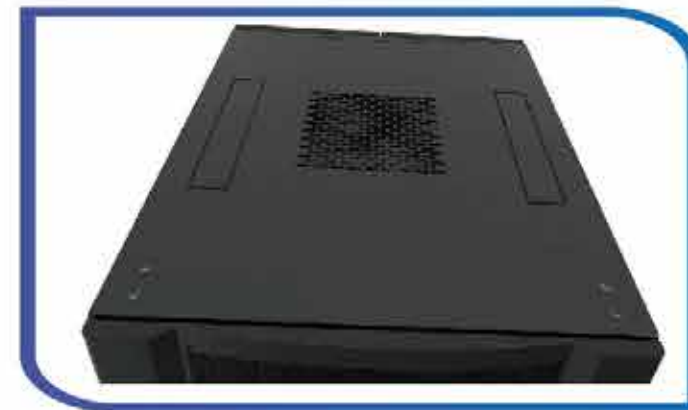


Main Structure

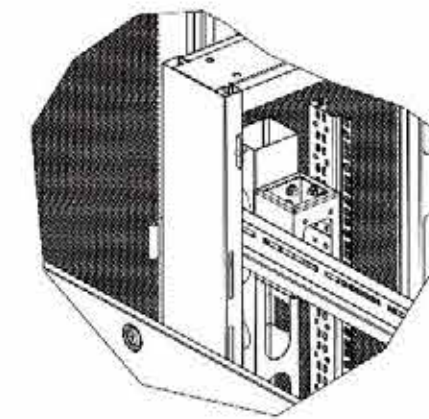


NO	Item
01	Side Door
02	Front Door
03	Frame
04	Rear Door
05	Top Cover
06	Connect Bar
07	Vertical cable management
08	Spacer
09	Rail
10	Bottom Cover
11	Panel
12	Castor

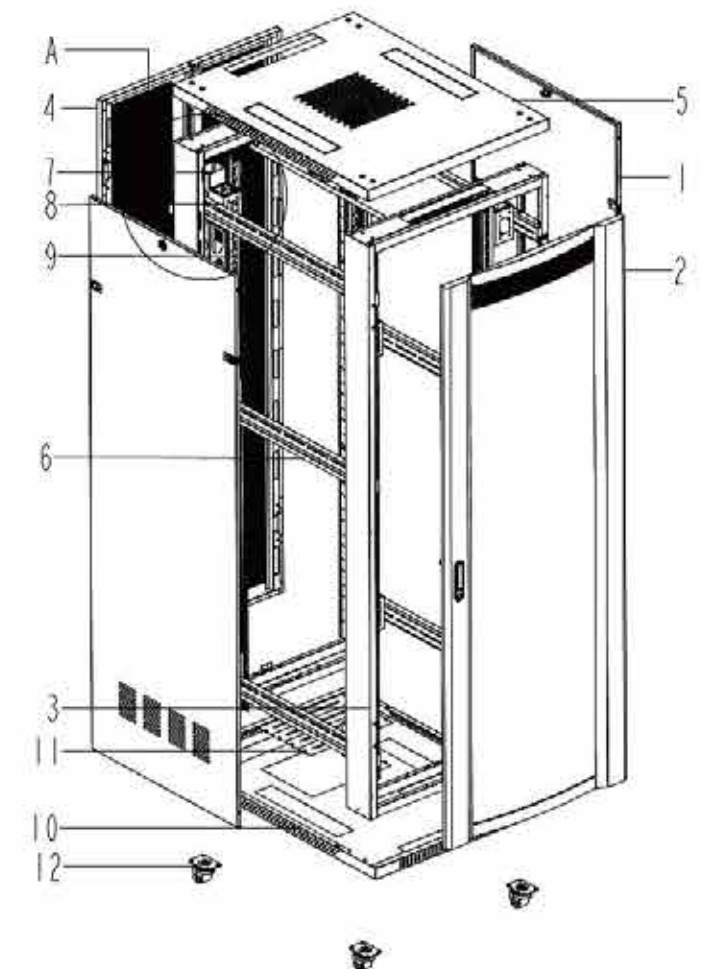


> Flat packing:Reducing your shipping and storage cost

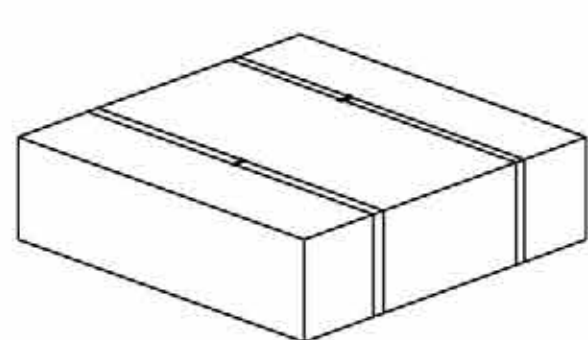


TOP COVER ,BOTTOM PANEL ,MOUNTING ANGLE ,
FANS UNIT AND ACCESSORIES

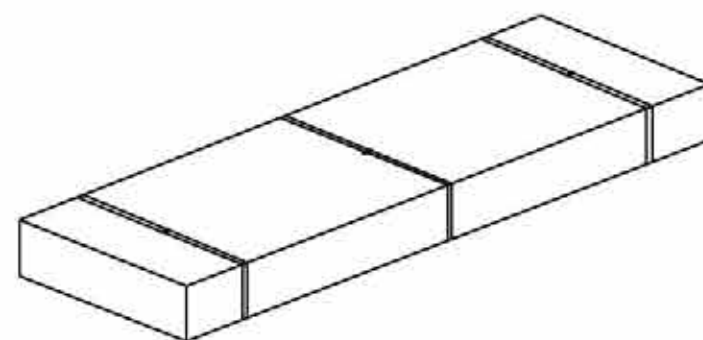

REAR DOOR,FRONT DOOR

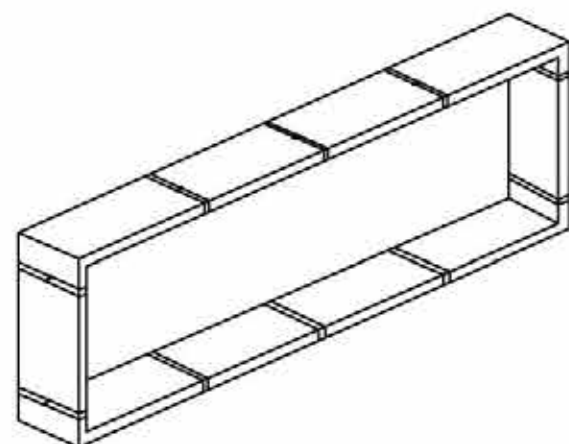

FRAME ,RAILS

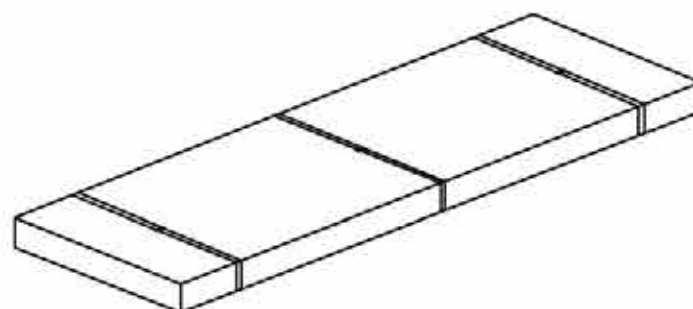

SIDE DOOR(2)

A=STEEL DOOR
WITHOUT HOLES



B=STEEL DOUBLE
SECTION DOOR



C=TOUGHENED GLASS
DOOR £ PLATE DOOR
BORDER




D=GRAY TEMPERED
GLASS DOOR £ VENTED
DOOR BORDER



E=HEXAGONAL
RETICULAR HIGH
DENSITY VENTED DOOR



F=DOUBLE SECTION
HEXAGONAL RETICULAR
HIGH DENSITY VENTED
PLATE DOOR

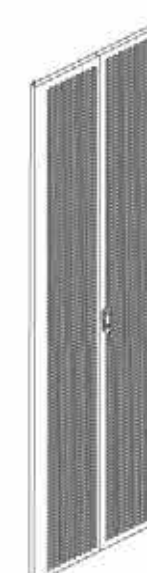

G=HEXAGONAL
RETICULAR HIGH
DENSITY VENTED
DOOR



H=HEXAGONAL
RETICULAR HIGH
DENSITY VENTED
PLATE DOOR



STANDARD SIZE

☆=COLOR A=BLACK (RAL9004) B=GRAY (RAL7044)

Standard Size Of Cabinet

EC-201 TWO Poles & EC-202 FOUR Poles Open Rack(With Wheels)

E.C.T

MODE NO.	CAPACITY	WIDTH(MM)	DEPTH(MM)	HEIGHT(MM)	PACKING DIMENSION			COLUME(CBM)
					W/M	D/M	H/M	
ECT18-66-* # ★	18U	600	600	988	0.62	0.62	1.01	0.3882
ECT18-68-* # ★		600	800		0.62	0.82	1.01	0.5135
ECT18-60-* # ★		600	1000		0.62	1.02	1.01	0.6387
ECT22-66-* # ★	22U	600	600	1166	0.62	0.62	1.19	0.4574
ECT22-68-* # ★		600	800		0.62	0.82	1.19	0.6050
ECT22-60-* # ★		600	1000		0.62	1.02	1.19	0.7526
ECT27-66-* # ★	27U	600	600	1388	0.62	0.62	1.41	0.5420
ECT27-68-* # ★		600	800		0.62	0.82	1.41	0.7168
ECT27-60-* # ★		600	1000		0.62	1.02	1.41	0.8917
ECT32-66-* # ★	32U	600	600	1610	0.62	0.62	1.63	0.6266
ECT32-68-* # ★		600	800		0.62	0.82	1.63	0.8287
ECT32-60-* # ★		600	1000		0.62	1.02	1.63	1.0308
ECT37-66-* # ★	37U	600	600	1833	0.62	0.62	1.86	0.7150
ECT37-68-* # ★		600	800		0.62	0.82	1.86	0.9456
ECT37-60-* # ★		600	1000		0.62	1.02	1.86	1.1763
ECT37-60-* # ★		800	800		0.82	0.82	1.86	1.2507
ECT37-80-* # ★		800	1000		0.82	1.02	1.86	1.5557
ECT42-66-* # ★	42U	600	600	2055	0.62	0.62	2.08	0.7996
ECT42-68-* # ★		600	800		0.62	0.82	2.08	1.0575
ECT42-60-* # ★		600	1000		0.62	1.02	2.08	1.3154
ECT42-88-* # ★		800	800		0.82	0.82	2.08	1.3986
ECT42-80-* # ★	45U	800	1000	2188	0.82	1.02	2.08	1.7397
ECT45-66-* # ★		600	600		0.62	0.62	2.21	0.8495
ECT45-68-* # ★		600	800		0.62	0.82	2.21	1.1236
ECT45-60-* # ★		600	1000		0.62	1.02	2.21	1.3976
ECT45-88-* # ★		800	800		0.82	0.82	2.21	1.4860
ECT45-80-* # ★	47U	800	1000	2277	0.82	1.02	2.21	1.8484
ECT47-66-* # ★		600	600		0.62	0.62	2.3	0.8841
ECT47-68-* # ★		600	800		0.62	0.82	2.3	1.1693
ECT47-60-* # ★		600	1000		0.62	1.02	2.3	1.4545
ECT47-88-* # ★		800	800		0.82	0.82	2.3	1.5465
ECT47-80-* # ★		800	1000		0.82	1.02	2.3	1.9237

*-front door #-back door ★-color



Product Description

Open Rack
Modular Design, Easy Assembled and Disassembled for Delivery, Low-Cost
Various Optional Accessories According to Requirements(Cable Management Slot, Removable Working Panel, etc.)

Standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Body: 1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL7044, RAL9004 etc.

MODEL NO.	Capacity	Width	Depth	Height
EC-201-22	22U	600	100	1119
EC-201-32	32U	600	100	1582
EC-201-42	42U	600	100	2007
EC-201-47	47U	600	100	2230



Product Description

Open Rack
Modular Design, Easy Assembled and Disassembled for Delivery, Low-Cost
Various Optional Accessories According to Requirements(Cable Management Slot, Removable Working Panel, etc.)

Standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Body: 1.5mm

Surface finish:

Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL7044, RAL9004 etc.

MODEL NO.	Capacity	Width	Depth	Height
EC-202-22	22U	600	600	1119
EC-202-32	32U	600	600	1582
EC-202-42	42U	600	600	2007
EC-202-47	47U	600	600	2230

EC-006 Double Section Wall Mount Cabinet

Eldor Communication Technologies **E.C.T**



IP20

Loading
Capacity
60KGS



Any color customization



>Rail Mounts with "U" Marking, It's Easy to Install the Equipment in Right Height.



>Back Door Hinge, Max Loading Is 60KGS




>100mm Depth Back Door can be Open



>Rail can be Easy to be Assembled. Also can Adjust the Depth Between the rails

Main Structure

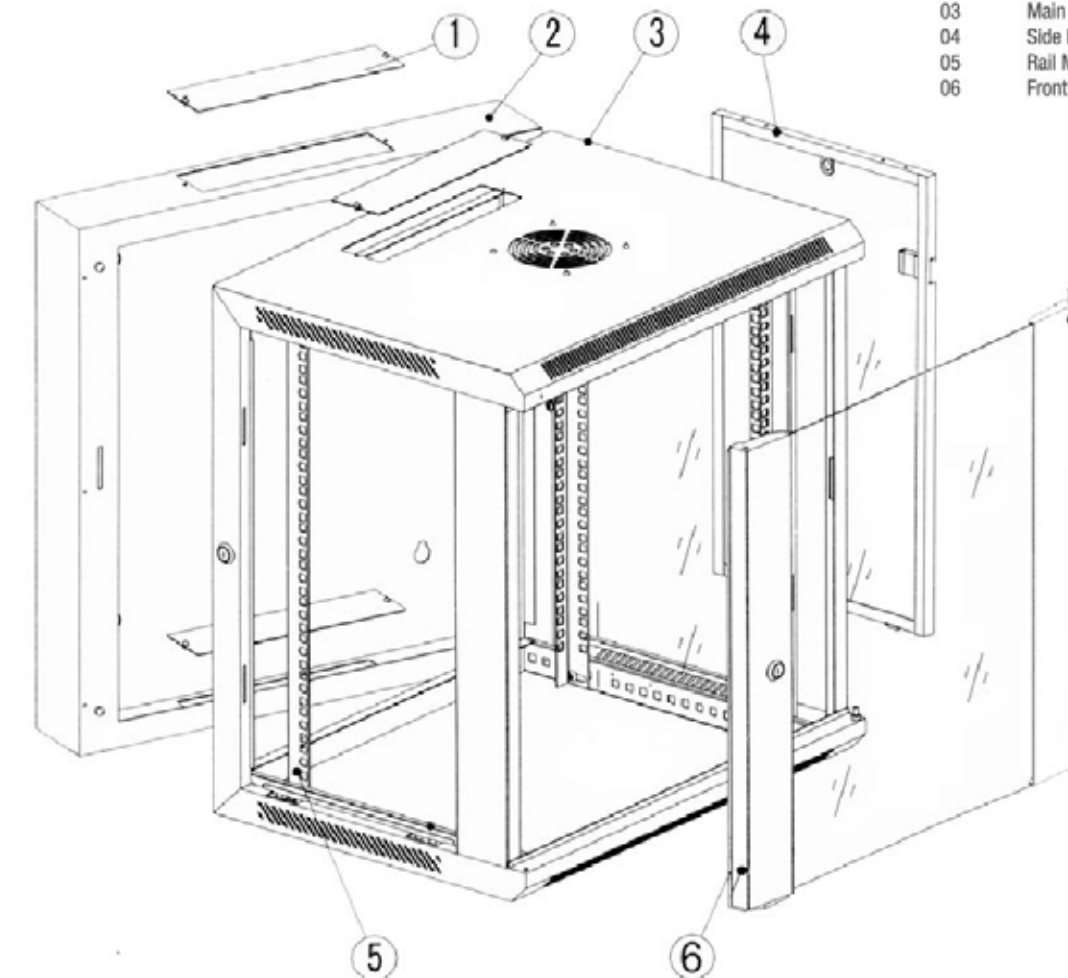

NO	Item
01	Cable Entry Panel
02	Back Section Door
03	Main Frame
04	Side Panel
05	Rail Mount
06	Front Temper Glass Door

Product Description:

- *Two Section/ Double Section Wall Mount Cabinet
- *Welded frame, reliable structure
- *Standing or wall mounting installation
- *Adjustable feet and heavy duty castors are optional
- *Easy mounting installation
- *19" standard installation
- *Removable side panels, side locks optional
- *Cable entry on both of top cover and bottom panel
- *120mm fan available (220V or 110V)
- *Turning angle of front door is over 180 degrees.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 1.50mm others: 1.2mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL9004 etc.

EC-006B

Double Section Wall Mount Cabinet (Flat Packing)

Eldor Communication Technologies **E.C.T**

19"

IP20

Loading
Capacity
60KGS



Any color customization



Product Description:

- *Two Section/ Double Section Wall Mount Cabinet
- *Can be Disassembled, Flat Packing, Save the Shipping Cost.
- *Standing or wall mounting installation
- *Adjustable feet and heavy duty castors are optional
- *Easy mounting installation
- *Removable side panels, side locks optional
- *Cable entry on both of top cover and bottom panel
- *120mm fan available (220V or 110V)
- *Turning angle of front door is over 180 degrees.

Standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 1.50mm others: 1.2mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.


Body Color:

RAL7035, RAL9004 etc.




MULTI-VIEW


BOTTOM




TOP




SIDE



FRONT



SIDE



BACK



>Rail Mounts with "U" Marking. It's Easy to Install the Equipment in Right Height.



>Earth Kit



>100mm Depth Back Door can be Open



>Knockable Cable Entry

EC-007 Single Section Wall Mount Cabinet

Eldor Communication Technologies **E.C.T**

19"

IP20

Loading
Capacity
60KGS



Any color customization



Product Description:

- *One Section/ Single Section Wall Mount Cabinet
- *Welded frame, reliable structure
- *Standing or wall mounting installation
- *Adjustable feet and heavy duty castors are optional
- *Removable side panels, side locks optional
- *Cable entry on both of top cover and bottom panel
- *120mm fan available (220V or 110V)
- *Turning angle of front door is over 180 degrees.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 1.50mm others: 1.2mm

Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting

Body Color:

RAL7035, RAL7044, RAL9004 etc.



>Top with Ventilation Holes



>Front Door Bolt, the Doors can be Installed Right or Left Side.



>Quick Open Side door, Lock is Optional



>Earth Kit

EC-007B

Single Section Wall Mount Cabinet (Flat Packing)

Eldor Communication Technologies **E.C.T**

19"

IP20

Loading
Capacity
60KGS



Any color customization



Product Description:

- *One Section/ Single Section Wall Mount Cabinet
- *Can be Disassembled, Flat Packing, Save the Shipping Cost.
- *Standing or wall mounting installation
- *Adjustable feet and heavy duty castors are optional
- *Removable side panels, side locks optional
- *Cable entry on both of top cover and bottom panel
- *120mm fan available (220V or 110V)
- *Turning angle of front door is over 180 degrees.

standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard

Material:

High grade cold rolled steel.

Thickness:

Mounting profile: 1.50mm others: 1.2mm


Surface finish:

Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.

Body Color:

RAL7035, RAL7044, RAL9004 etc.

NO	Item
01	Top cover
02	Bottom cover
03	Frame
04	Front glass door
05	Rear door
06	Side door
07	Top panel

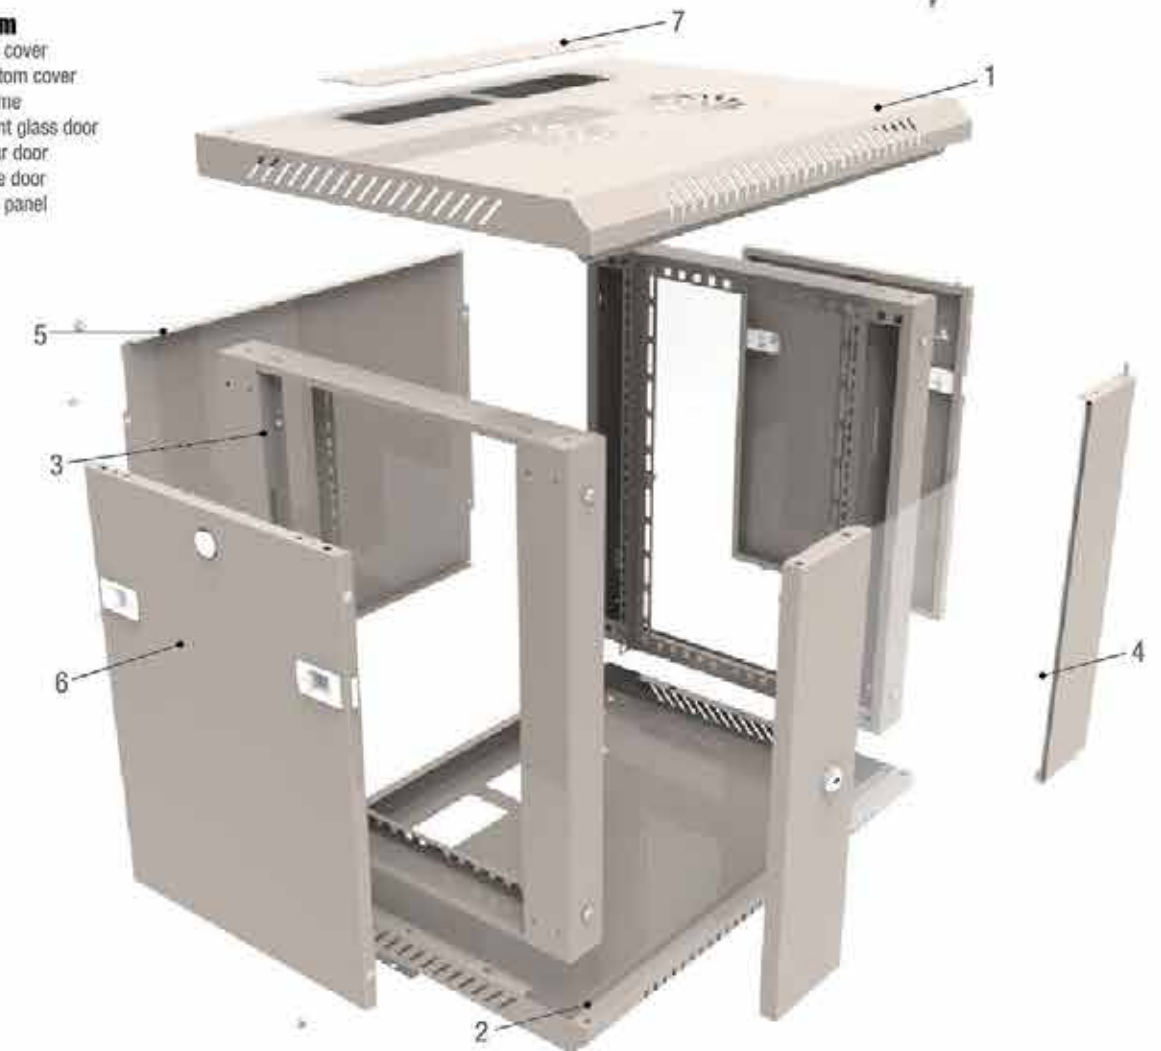

>Accessory Bag Fixed with Rails



>Quick Open Side door, Lock is Optional



>Rail Mounts with "U" Marking, It's Easy to Install the Equipment in Right Height.



>Earth Kit

EC-008 Economy Wall Mount Cabinet


E.C.T



TN-008 Economy Wall Mount Cabinet Product Description

One Section/ Single Section Wall Mount Cabinet
Welded frame, reliable structure
Standing or wall mounting installation
Removable side panels, side locks optional
Cable entry on both of top cover and bottom panel
Turning angle of front door is over 180 degrees.

NO	Item
01	Top Cover
02	Front Temper Glass Door
03	Bottom Cover
04	Frame
05	Rail Mount
06	Side Panel
07	Rear
08	Entry Panel

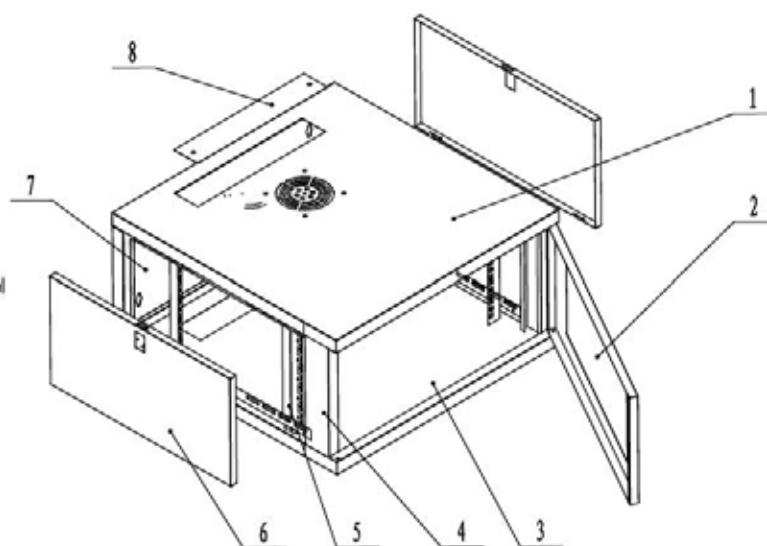

EC-009 Economy Wall Mount Cabinet



Product Description:

One section wall mount cabinet.
Frame structure,max loading 60kg.
The Frame Can Be removed According To Requirement.
Wall and stand installation type,optional castor and support feet for stand installing.
Quick open side door with lock easy to install and maintain.
Top and bottom wire path.
Optional 120mm axial motor 1 piece or 2 pieces.
Can be shipped as assembled or unassembled.
Can be do flat packing as customer require.

EC-010

USB 2.0 Charging cabinet

E.C.T
Standard Size Of Wall Mount Cabinet


19"

IP20

Loading
Capacity
60KGS



Any color customization



4mm holes Ventilation Rate 65%
5.5mm holes Ventilation Rate 50%
6.5mm holes Ventilation Rate 85%
8mm holes Ventilation Rate 70%

Product Description:

This Ipad charging cabinet protect and charge the 30x10.1" and 1x15.6"laptop.

Main feature:

19" installation rail create capacity for you
20/30/40 unit capacity with 25 mm wide slots and sliding drawer for operation ideal for tablets, total 2 levels
1xsliding shelf for laptop ,Detail size will be adjusted when drawing confirmation
80mm gap between every level for airflow and cooling—great for charging Detail size will be adjusted when drawing confirmation
19" installation shelf allow you to adjust the shelf location accordingly to mix and match devices: removable if not need.
Cable entrance punched in back wall panel,allow for power supply and good for cable management

Efficiency:

2" swiveling wheels included for moving
Rear wall mounting panel for storage

Security:

Secure storage.
Durable SPCC steel doors include handle with unique key lock.
Cabinet is made up to 1.2 mm, with 1.5mm mounting rails.
Well designed ventilation and continuous operating fans keep devices cool
For user and equipment safety, the entire cabinet is to be tested and certified to CE, RoHS, ETSI standard
Cooling/ventilation: 2 AC continuous operation fans keep equipment cool
Country-specific power cord = 1.5m long
Power system: input/output = 220-250V~, 10A, 50/60 Hz
Temperature range: operating 0° to 30°C (32° to 86°F); storage -40°C to 60°C (-40° to 140°F)



MODE NO.	CAPACITY	WIDTH(MM)	DEPTH(MM)	HEIGHT(MM)	PACKING DIMENSION			COLUME(CBM)
					W/M	D/M	H/M	
EC-006-6506	6U	600	550	368	0.62	0.57	0.39	0.1378
EC-006-6606		600	600		0.62	0.62	0.39	0.1499
EC-006-6509	9U	600	550	501	0.62	0.57	0.52	0.1838
EC-006-6609		600	600		0.62	0.62	0.52	0.1999
EC-006-6512	12U	600	550	635	0.62	0.57	0.66	0.2332
EC-006-6612		600	600		0.62	0.62	0.66	0.2537
EC-006-6515	15U	600	550	769	0.62	0.57	0.79	0.2792
EC-006-6615		600	600		0.62	0.62	0.79	0.3037
EC-006-6518	18U	600	550	901	0.62	0.57	0.92	0.3251
EC-006-6618		600	600		0.62	0.62	0.92	0.3536
EC-006-6522	22U	600	550	1082	0.62	0.57	1.1	0.3887
EC-006-6622		600	600		0.62	0.62	1.1	0.4228
EC-006-6527	27U	600	550	1304	0.62	0.57	1.32	0.4665
EC-006-6627		600	600		0.62	0.62	1.32	0.5074



MODE NO.	CAPACITY	WIDTH(MM)	DEPTH(MM)	HEIGHT(MM)	PACKING DIMENSION			COLUME(CBM)
					W/M	D/M	H/M	
EC-007-6406	6U	600	450	368	0.62	0.47	0.39	0.1136
EC-007-6606		600	600		0.62	0.62	0.39	0.1499
EC-007-6409	9U	600	450	501	0.62	0.47	0.52	0.1515
EC-007-6609		600	600		0.62	0.62	0.52	0.1999
EC-007-6412	12U	600	450	635	0.62	0.47	0.66	0.1923
EC-007-6612		600	600		0.62	0.62	0.66	0.2537
EC-007-6415	15U	600	450	769	0.62	0.47	0.79	0.2302
EC-007-6615		600	600		0.62	0.62	0.79	0.3037
EC-007-6418	18U	600	450	901	0.62	0.47	0.92	0.2681
EC-007-6618		600	600		0.62	0.62	0.92	0.3536
EC-007-6422	22U	600	450	1082	0.62	0.47	1.1	0.3205
EC-007-6622		600	600		0.62	0.62	1.1	0.4228
EC-007-6427	27U	600	450	1304	0.62	0.47	1.32	0.3846
EC-007-6627		600	600		0.62	0.62	1.32	0.5074

Standard Size Of Economy Wall Mount Cabinet

Optional Door For Wall Mount Cabinet




E.C.T

MODE NO.	CAPACITY	WIDTH(MM)	DEPTH(MM)	HEIGHT(MM)	PACKING DIMENSION			COLUME(CBM)
					W/M	D/M	H/M	
EC-007-5406	6U	550	450	368	0.57	0.47	0.39	0.105
EC-007-5606		550	600	368	0.57	0.62	0.39	0.137
EC-007-5409	9U	550	450	501	0.57	0.47	0.52	0.14
EC-007-5609		550	600	501	0.57	0.62	0.52	0.184
EC-007-5412	12U	550	450	635	0.57	0.47	0.66	0.177
EC-007-5612		550	600	635	0.57	0.62	0.66	0.233
EC-007-5415	15U	550	450	769	0.57	0.47	0.79	0.212
EC-007-5615		550	600	769	0.57	0.62	0.79	0.28
EC-007-5418	18U	550	450	901	0.57	0.47	0.92	0.246
EC-007-5618		550	600	901	0.57	0.62	0.92	0.279
EC-007-5422	22U	550	450	1082	0.57	0.47	1.1	0.295
EC-007-5622		550	600	1082	0.57	0.62	1.1	0.389
EC-007-5427	27U	550	450	1304	0.57	0.47	1.32	0.354
EC-007-5627		550	600	1304	0.57	0.62	1.32	0.467

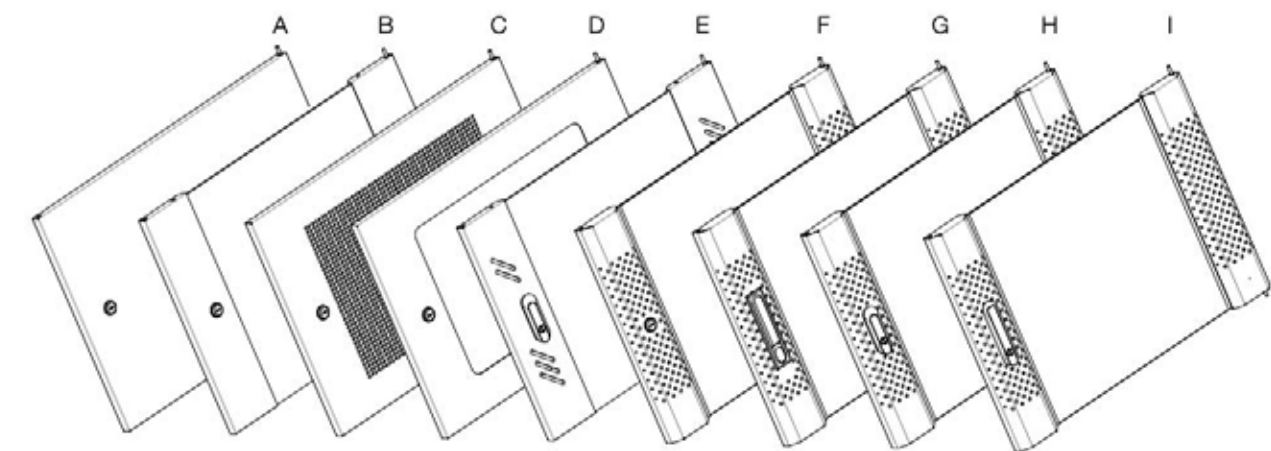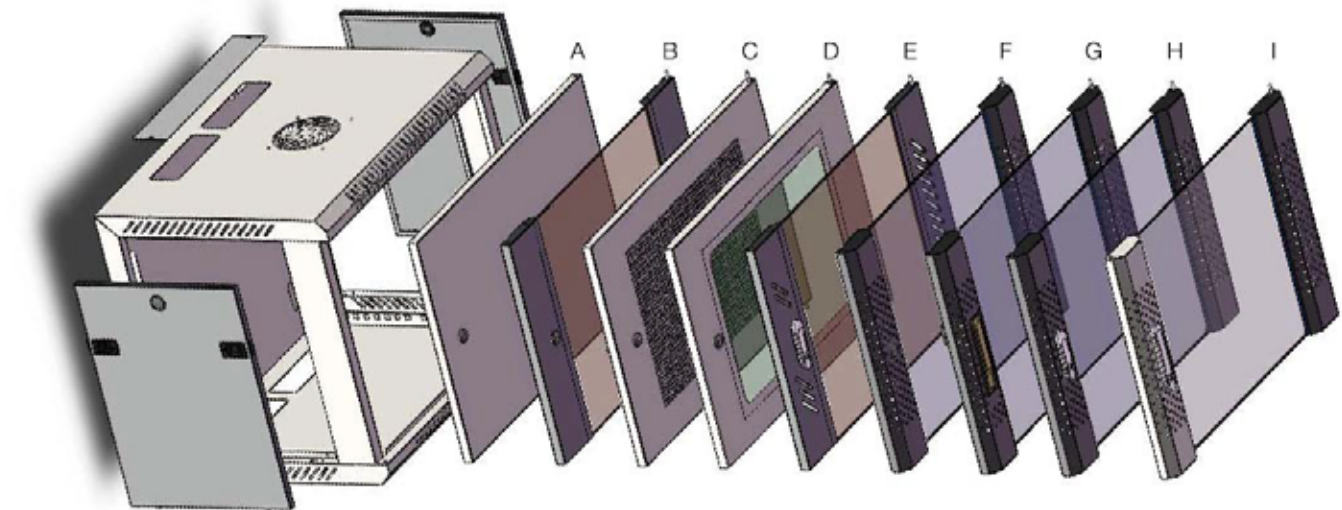

A=STEEL DOOR WITHOUT HOLES
 B=TOUGHENED GLASS DOOR WITH
 FLAT DOOR BORDER
 C=STEEL DOOR WITH HOLES
 D=WINDOW TYPE TOUGHENED GLASS DOOR
 E=TOUGHENED GLASS DOOR WITH VENTED
 DOOR BORDER(MOONLIGHT LOCK)

F=TOUGHENED GLASS DOOR WITH ROUND
 VENTED BORDER(88A LOCK)
 G=TOUGHENED GLASS DOOR WITH ROUND
 VENTED BORDER(730 LOCK)
 H=TOUGHENED GLASS DOOR WITH ROUND
 VENTED BORDER(MOONLIGHT LOCK)
 I=TOUGHENED GLASS DOOR WITH ROUND
 VENTED BORDER(MS 818 LOCK)

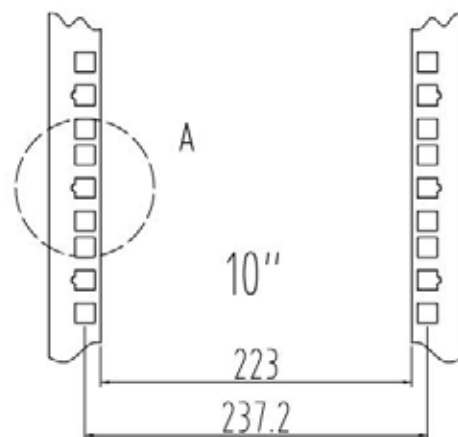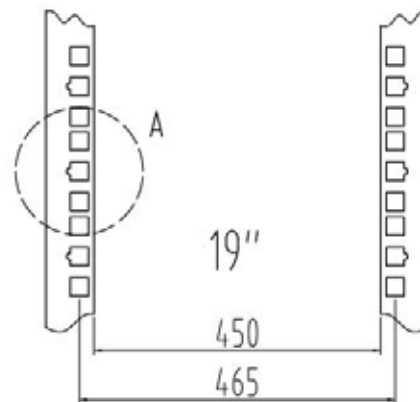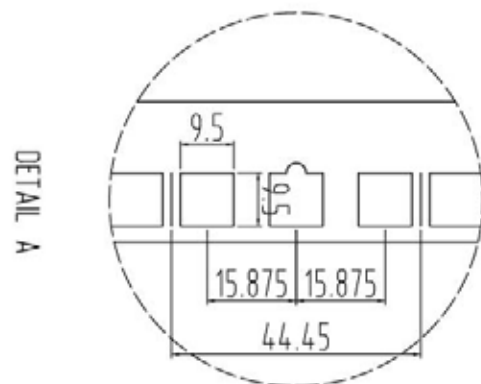



Fixed Shelf

EC-301-1

Free standing Cabinet
Size: 480(w)*315(d) for 600mm Depth cabinet
480(w)*515(d) for 800mm Depth cabinet
480(w)*715(d) for 1000mm Depth cabinet
Wall Mount Cabinet
Size: 498(w)*280(d) for 450mm & 500mm Depth wall mount cabinet
498(w)*400(d) for 550mm & 600mm Depth wall mount cabinet



EC-301-4

Sliding Shelf

Size: 465(w)*350(d) for 600mm Depth cabinet
465(w)*550(d) for 800mm Depth cabinet
465(w)*750(d) for 1000mm Depth cabinet



1U Fan Unit

EC-301-7A

Size: 483(w)*200(d)*1U(h) with 2 fans
483(w)*320(d)*1U(h) with 4 fans



EC-301-9

Brush Panel

Size: 483(w)*1U(h)
483(w)*2U(h)
483(w)*3U(h)
483(w)*4U(h)



EC-301-2

Support Board

Size: 483(w)*315(d)*1U(h)
483(w)*315(d)*2U(h)



EC-301-5

Keyboard Tray

Size: 483(w)*380(d) for 600mm Depth cabinet
483(w)*580(d) for 800mm Depth cabinet
483(w)*780(d) for 1000mm Depth cabinet



EC-301-7B

1U Fan Unit With Thermostat

Size: 483(w)*200(d)*1U(h) with 2 fans
483(w)*320(d)*1U(h) with 4 fans



EC-301-10

Fiber Box

Size: 483(w)*250(d)*1U(h)
483(w)*350(d)*1U(h)
483(w)*450(d)*1U(h)



EC-301-3

Front and Back Fixed Shelf

Size: 483(w)*250(d)*1U(h)
483(w)*350(d)*1U(h)
483(w)*550(d)*1U(h)
483(w)*250(d)*2U(h)
483(w)*350(d)*2U(h)
483(w)*550(d)*2U(h)



EC-301-6

Fan Tray

Size: 415(w)*355(d)*20(h) for 600mm Depth cabinet
415(w)*555(d)*20(h) for 800mm Depth cabinet
415(w)*755(d)*20(h) for 1000mm Depth cabine



EC-301-8

Bracket

Size: 530(w)*250(d)*1U(h)
530(w)*350(d)*1U(h)
530(w)*450(d)*1U(h)
530(w)*250(d)*2U(h)
530(w)*350(d)*2U(h)
530(w)*450(d)*2U(h)



EC-301-11

Cable Management Type A

Size: 483(w)*450(d)*1U(h)
483(w)*450(d)*2U(h)



EC-301-12

Cable Management Type B

Size: 483(w)*450(d)*1U(h)
483(w)*450(d)*2U(h)



EC-301-15

Fan
220V, 110V
Size: 120mm*120mm*38mm



EC-301-18

730# Lock
Spring Lock



EC-301-21A

3 Inch Castor
Castor1:Normal Castor
Castor2:Castor With Brake



EC-301-13

cable management (5pcs plastic rings)

Size: 483(w)*450(d)*1U(h)
483(w)*450(d)*2U(h)



EC-301-16

1U 2U 3U 4U Blank Panel SPCC Cold Rolled Steel Powder Coat Finish

Size: 483(w)*450(d)*1U(h)
483(w)*450(d)*2U(h)
483(w)*450(d)*3U(h)
483(w)*450(d)*4U(h)



EC-301-19

88A Lock
Small Round Lock



EC-301-21B

2 Inch Castor
Castor1:Normal Castor
Castor2:Castor With Brake



EC-301-14

L shape Angle Bar

Size: 483(w)*450(d)*1U(h)
483(w)*450(d)*2U(h)



EC-301-17

MS818 Lock
Spring Lock



EC-301-20

Moonlight Lock



EC-301-21C

1.5 Inch Castor
Castor1:Normal Castor
Castor2:Castor With Brake



Side Brake Castor
1.5/2/3 Inch Optional
EC-301-21D



EC-301-24 **EC 819**



EC-301-22 **Adjustable Feet**
Size: 122mm*φ10mm



EC-301-25 **19" LED light**



EC-301-23 **Cage Nuts**
Size: M8*16



EC-301-26
PP Socket + Cold Rolled Steel Shell
Economy Optional



EC-301-27

Germany Type Power Distribution Unit(PDU)
19" Horizontal Installation(6 ways to 8 ways)
Vertical Installation(9 ways to 20 ways)
Aluminium Or PVC Shell Optional



EC-301-29

French Type Power Distribution Unit(PDU)
19" Horizontal Installation(6 ways to 8 ways)
Vertical Installation(9 ways to 20 ways)
Aluminium Or PVC Shell Optional



EC-301-28

Austrian Type Power Distribution Unit(PDU)
19" Horizontal Installation(6 ways to 8 ways)
Vertical Installation(9 ways to 20 ways)
Aluminium Or PVC Shell Optional



EC-301-30

British Type Power Distribution Unit(PDU)
19" Horizontal Installation(6 ways to 8 ways)
Vertical Installation(9 ways to 20 ways)
Aluminium Or PVC Shell Optional

